


# ST BLADE SPLIT BUS FUSE BLOCK

## Features

- Provides two isolated groups of six ATO®/ATC® circuits
- For use with two isolated batteries, or a single battery providing a mix of 24-hour and switched circuits
- Insulating cover satisfies ABYC/USCG insulation requirements and provides storage for two spare fuses
- Accepts ring terminals
- Easy to open, push button latch provides easy access to fuses
- Tin-plated copper buses and fuse clips
- Includes 20 write-on circuit labels
- Fuses sold separately

## Specifications

Voltage Maximum Operating	32V DC
Amperage Maximum Operating	30A per circuit 100A total (not to exceed 80A per load group)
Fuse Type	ATO® or ATC® Fuses
Screw Terminal	#8-32 Screw with captive lock washer
Mounting	#8 Screw (M4)
Recommended Wire Size	Positive Feed: 4 – 6 AWG (25 – 16 mm <sup>2</sup> ) Branch Circuits: 10 – 16 AWG (6 – 1.5 mm <sup>2</sup> )
Recommended Torque	#10 Stud: 24 in-lb (2.71 N-m) #8 Screw: 18 in-lb (2.03 N-m)

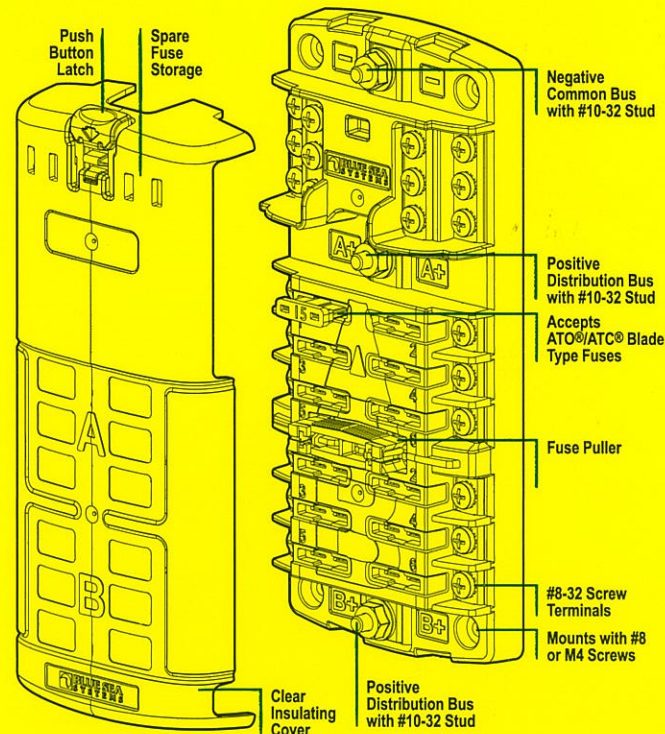

**BLUE SEA**  
SYSTEMS

425 Sequoia Drive  
Bellingham, WA 98226 USA  
p 360.738.8230  
p 800.222.7617 USA and Canada  
f 360.734.4195  
conductor@blueseas.com  
www.blueseas.com

**PROP 65 WARNING**  
This product may contain  
a chemical known to the  
State of California to  
cause cancer, birth defects,  
or other reproductive harm.



Assembled In Mexico

980017960 Rev. 003